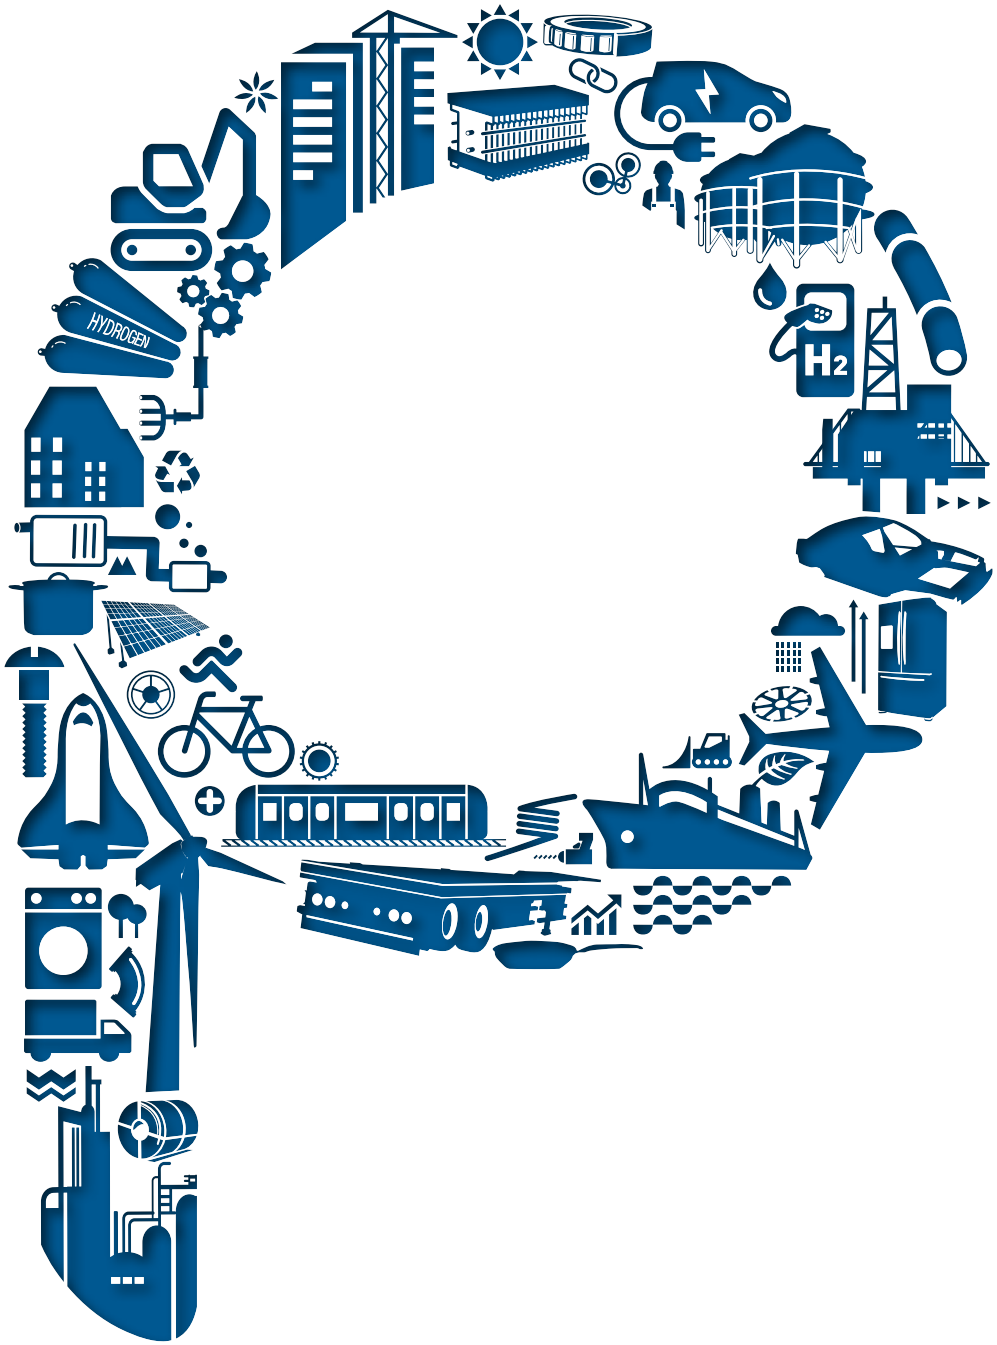


Titanium

posco

Titan of the world
Gift for human welfare

Discovered in 1790 and put in industrial usage in 1950, titanium has very short history compared to other materials. However, it is becoming one of the most important materials in 21st century. Especially, its superior specific strength and corrosion resistance have been expanding its usage from aircraft to shipbuilding, power plants, medical equipment, and other industrial fields. POSCO, as a total material provider, has entered titanium industry with world-leading technologies and experience accumulated in its steelmaking operations, and delivers better products to our customers with high stability.

1790년에 발견되어 1950년 상업생산이 시작된 티타늄은 다른 금속에 비해 그 역사는 짧지만 21세기에 주목 받는 신소재로서 비약적인 발전을 하고 있습니다. 특히, 높은 비강도와 뛰어난 내식성으로 인해 과거 우주항공산업에 국한되어 있던 응용분야를 최근 조선, 발전, 의료기기, 생활용품 등 일반 산업분야로 확대하고 있습니다. 포스코는 종합소재메이커로서 철강사업에서 축적한 세계 최고의 기술과 경험을 바탕으로 티타늄판재 사업을 시작하였으며, 스펀지 티타늄 제조사인 카자흐스탄의 UKTMP사와 합작사 설립으로 원료부터 제품까지 일관생산체제를 구축함으로써 고객에게 보다 경쟁력 있는 제품을 안정적으로 공급하고 있습니다.

posco TITANIUM

04 CHARACTERISTICS
06 COST EFFECTIVENESS
08 MANUFACTURING PROCESS
10 TITANIUM PRODUCTS
- HOT ROLLED/COLD ROLLED COILS & SHEETS
- PLATES
13 TECHNICAL DATA
18 APPLICATION
- MAIN APPLICATION 1
- MAIN APPLICATION 2
- MAIN APPLICATION 3

04 티타늄의 특성
06 티타늄 경제성
08 제조 공정
10 티타늄 제품
– HR/CR 코일 & 시트
– 후판
13 Technical Data
18 적용사례
– Application1
– Application2
– Application3

Besides its superior quality in weight, strength and corrosion resistance, titanium is a non-toxic, environment-friendly metal.

티타늄은 무게, 강도, 내식성에 있어 우수할 뿐만 아니라 무독성의 환경친화적 금속입니다.

Characteristics



Light Weight

Specific gravity about 60% of steel

일반강 대비 60% 수준의 비중

High Specific Strength

Strength similar to steel

일반강 수준의 강도

Corrosion Resistance

Excellent corrosion resistance against seawater

해수에 대한 뛰어난 내식성

Low Thermal Expansion

Thermal expansion similar to glass or concrete

유리, 콘크리트와 유사한 열팽창계수

Non Magnetic

Never becomes magnetized

비자성

High Formability

Formability similar to 304 stainless steel

304스테인리스 스틸과 비슷한 수준의 성형성

Non Toxic

Low leaching out of metallic ions and low incidence of ionic allergy

낮은 수준의 금속이온의 침출 가능성 및 알레르기 발생률

Cost Effectiveness


In many applications, titanium offers opportunities for reducing operating costs.

- Better fuel economy through weight savings in engines and other mobile equipment
- Improved energy conservation by efficient heat transfer
- Resistance to aggressive materials such as crude oil with high level of hydrogen sulfide
- Reduction in environmental cost caused by corrosion leakage

티타늄 소재는 다양한 적용 분야에서 운전비용의 절감을 제공하고 있습니다.

- 제품의 경량화를 통해 엔진 등의 연료소비 절감
- 열전달 효율 향상을 통한 에너지 효율 향상
- 고 황화수소 원유 등과 같은 aggressive 소재에 대한 저항력
- 부식에 인한 오염물질 배출의 방지 등 환경비용 절감







Also, titanium provides cost reduction in maintenance and downtime by its superior corrosion resistance especially for plants and equipment designed for a long service life.

Welded titanium tube supplied for power plant surface condenser use, has been sold with a 40 year performance guarantee and many of the earlier installations of welded tube have now outlived their original guarantee period.

또한, 긴 수명이 요구되는 플랜트 및 장비에 티타늄을 사용하면 탁월한 내식성으로 유지 보수 비용을 절감할 수 있습니다. 발전소 콘덴서에 공급되는 티타늄 용접 튜브는 일반적으로 40년 이상의 품질보증을 하고 있으며 과거 설치된 튜브는 대부분 당초 보증기간 이상으로 사용되고 있습니다.

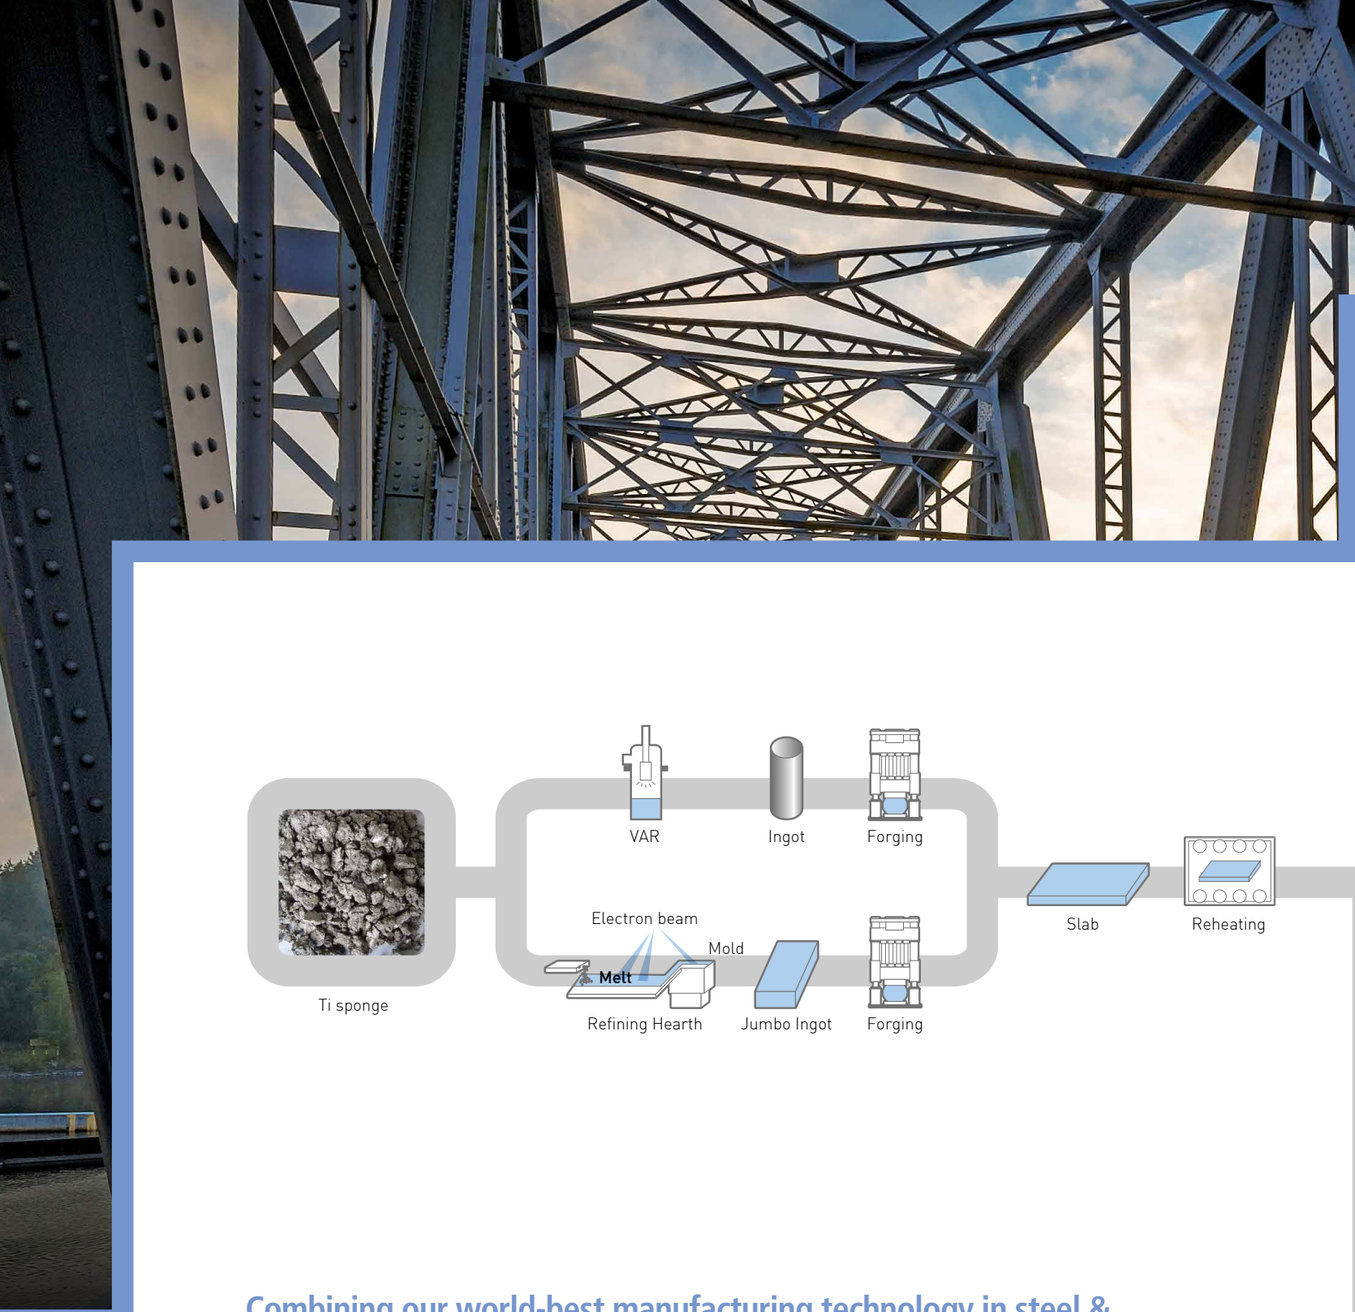


Manufacturing Process

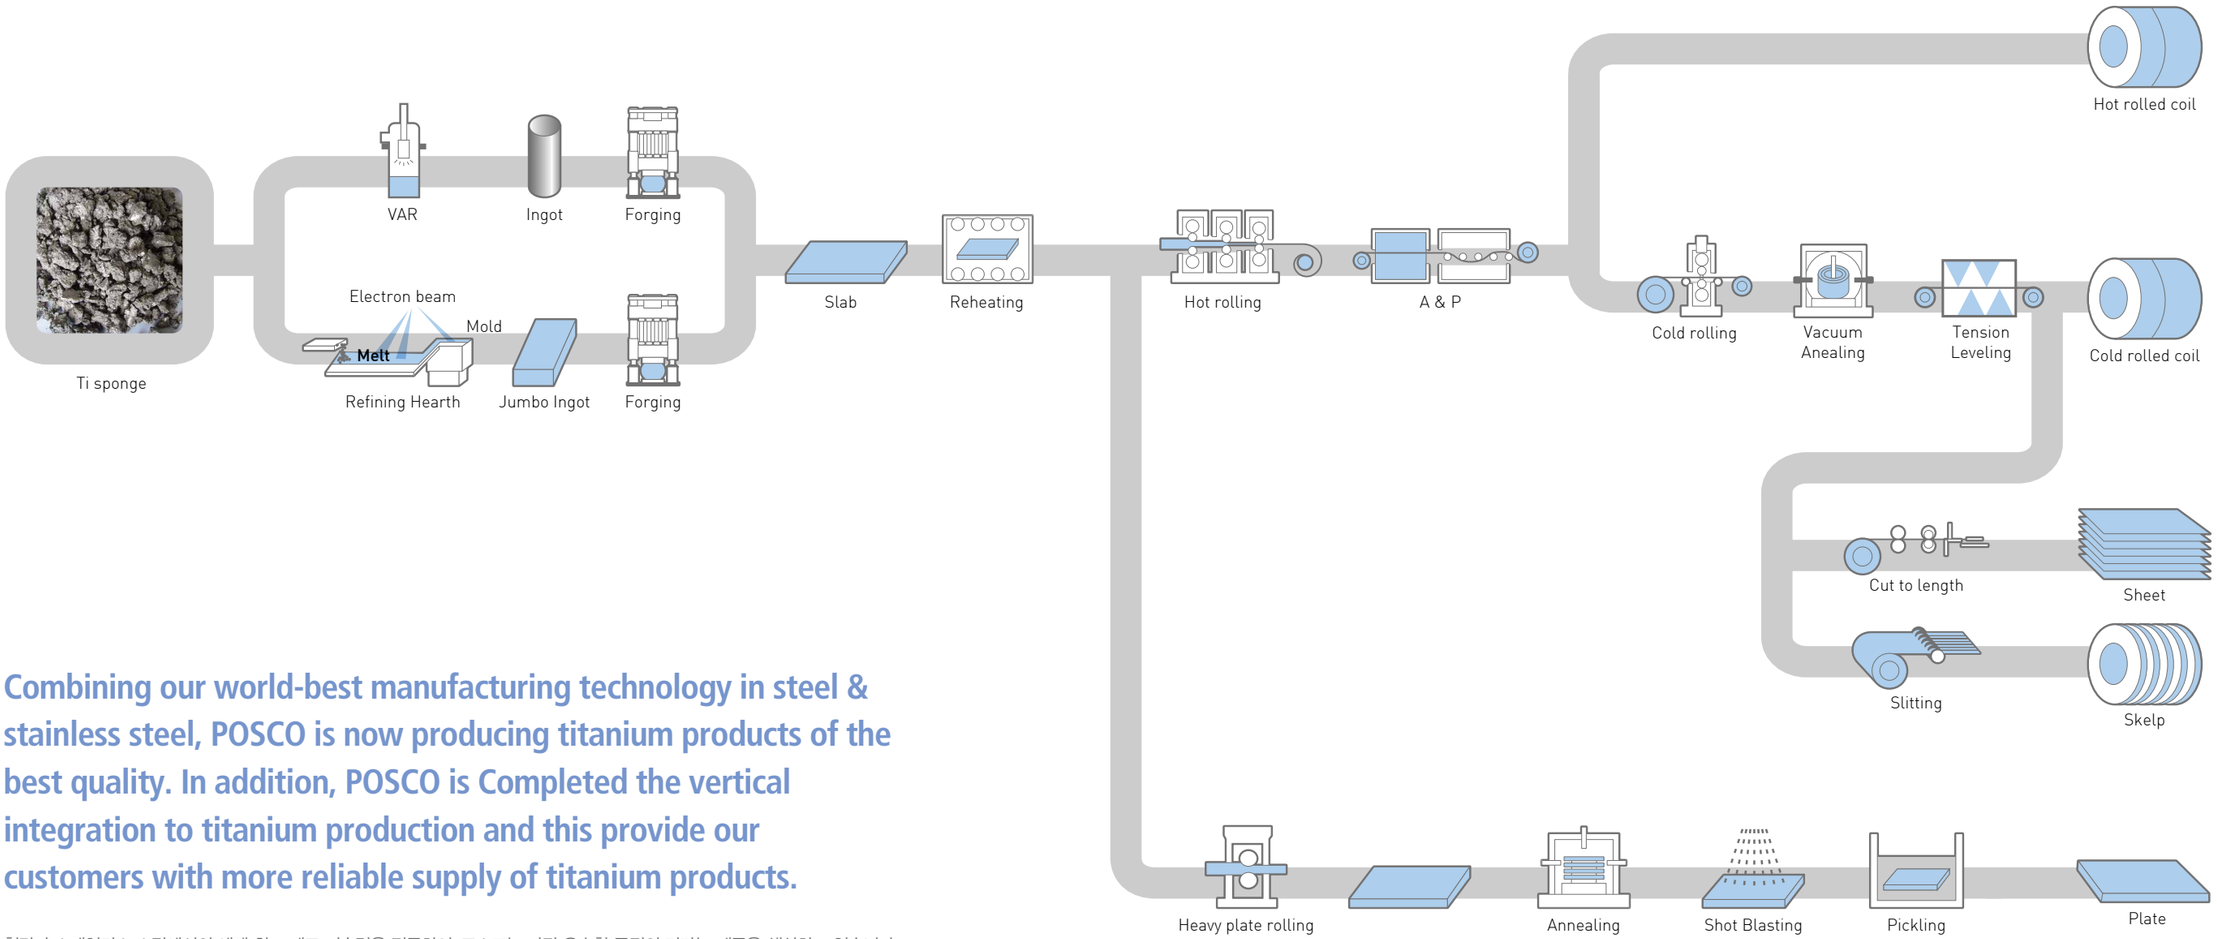

Combining our world-best manufacturing technology in steel & stainless steel, POSCO is now producing titanium products of the best quality. In addition, POSCO is Completed the vertical integration to titanium production and this provide our customers with more reliable supply of titanium products.

철강과 스테인리스 스틸에서의 세계 최고 제조 기술력을 접목하여, 포스코는 가장 우수한 품질의 티타늄 제품을 생산하고 있습니다.
또한, 완성된 티타늄 생산의 수직계열화를 통해, 고객에게 보다 안정적으로 티타늄 제품을 공급하고 있다.

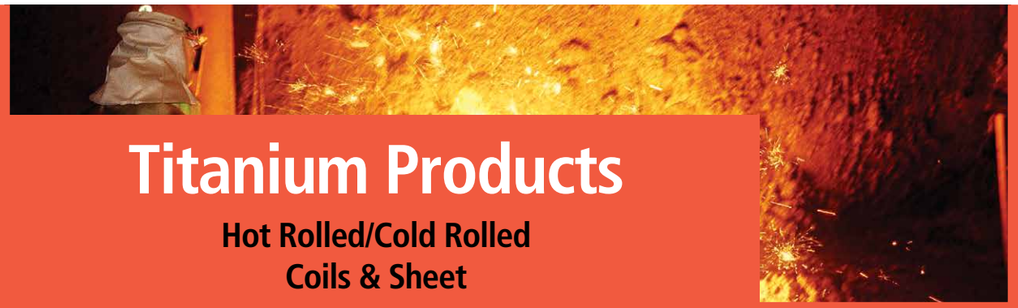

Titanium Products

Hot Rolled/Cold Rolled
Coils & Sheet



HR/CR Coils are produced in high quality and accurate dimensions, mainly used for heat exchanger tube for nuclear, thermal power plants and plate heat exchanger(PHE).

HR/CR 코일은 우수한 품질과 규격으로 생산되며
주로 원자력, 화력발전 등의 열교환기용 튜브 및 선박용 판형열교환기용 소재로 쓰입니다.

Application






Acceptable Standards

Standard	Grades
ASTM B265	Gr.1, Gr.2
ASME SB265	Gr.1, Gr.2
JIS H 4600	Class1, Class2


Available Sizes

COLD ROLLED SIZE (냉연)

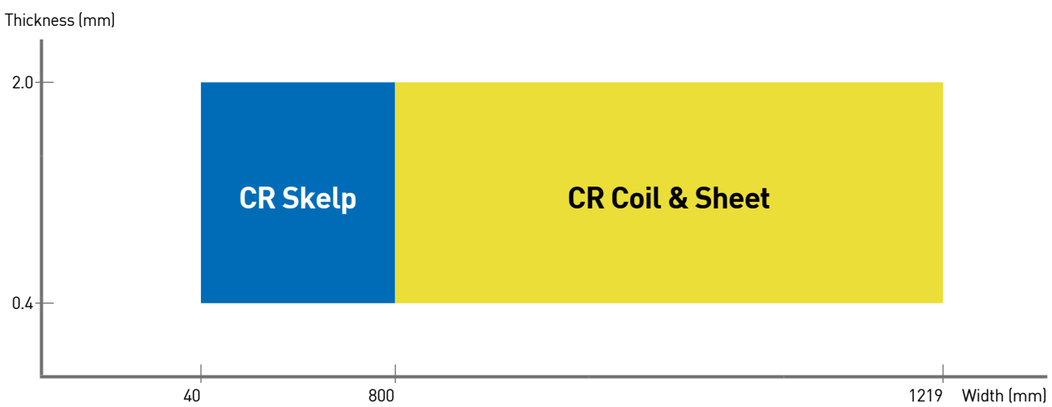

※ Maximum product length is 6,096mm

HOT ROLLED SIZE (열연)

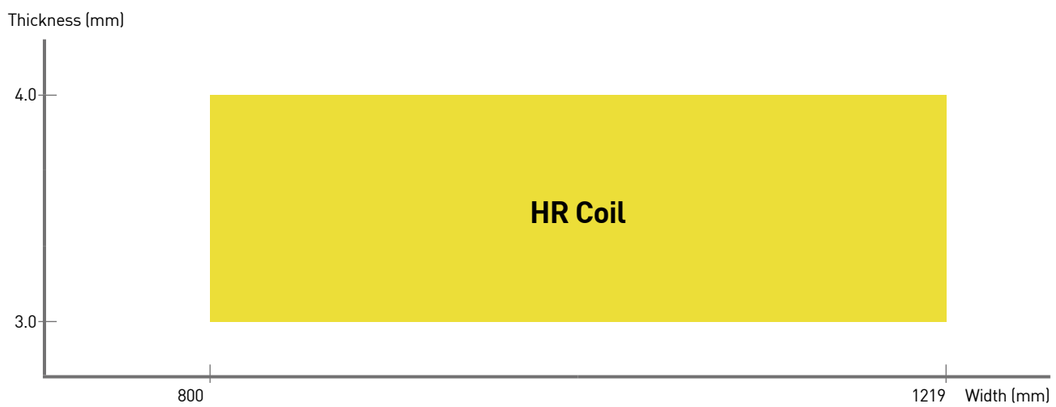



Titanium Products

Plates

Plates are mainly used for tube sheet and pressure vessel.

후판은 주로 열교환기의 튜브 경판과 입력용기 등의 소재로 쓰입니다.

Application






Acceptable Standards

Standard	Grades
ASTM B265	Gr.1, Gr.2
ASME SB265	Gr.1, Gr.2
JIS H 4600	Class1, Class2

Available Sizes

PLATES SIZE (후판)

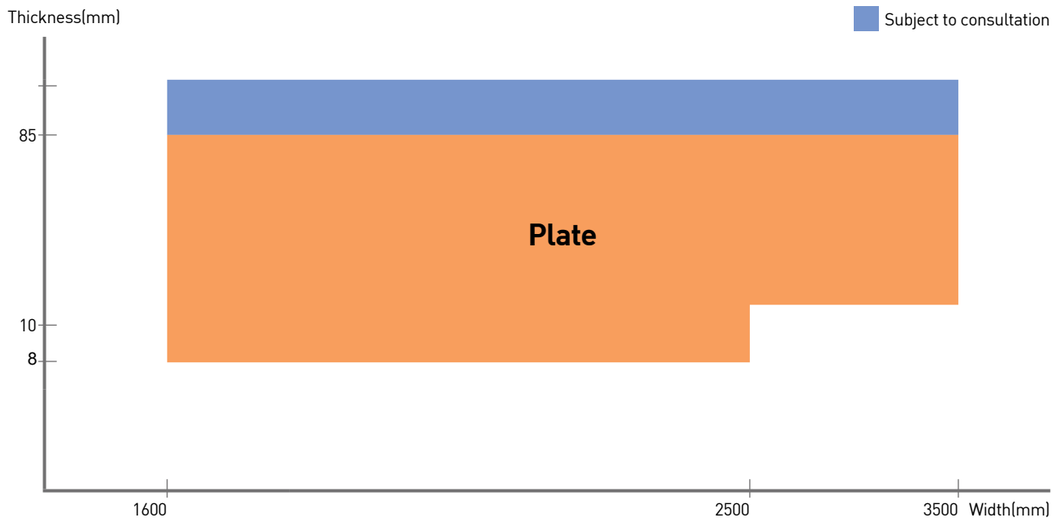

※ Maximum product length is 10,000mm

Technical Data

Titanium Standard

Chemical Composition & Mechanical Properties according to ASTM Standards						
DESIGNATION	GRADE 1	GRADE 2 Modified*	GRADE 2	GRADE 3	GRADE 4	GRADE 5
COMPOSITION(%MAX) 화학성분						
Oxygen (O)	0.18	0.25	0.25	0.35	0.40	0.20
Nitrogen (N)	0.03	0.03	0.03	0.05	0.05	0.05
Hydrogen (H)	0.015	0.015	0.015	0.015	0.015	0.015
Carbon (C)	0.08	0.08	0.08	0.08	0.08	0.08
Iron (Fe)	0.20	0.30	0.30	0.30	0.50	0.40
Aluminium (Al)	-	-	-	-	-	5.5~6.75
Vanadium (V)	-	-	-	-	-	3.5~4.5
Palladium (pd)	-	-	-	-	-	-
Residual each (total)	0.10(0.4)	0.10(0.4)	0.10(0.4)	0.10(0.4)	0.10(0.4)	0.10(0.4)
MECHANICAL PROPERTIES 기계적 성질						
Tensile Strength MPa min. (인장강도)	240	340	345	450	550	895
Yield Strength MPa (항복강도)	138~310	215~450	275~450	380~550	483~655	830
Elongation % min.(연신율)	24	20	20	18	15	10
Hardness HV typical (경도)	100~150	100~180	160~200	180~220	200~280	310~350

※ Gr.3, Gr.4. Gr.5 : Subject to consultation
※ Gr.2M : POSCO Standards

Physical Properties

Comparison of Physical Properties with those of other Metals

Item	Atomic no.	Atomic wt.	Density (g/cc)	Melting point (°C)	Linear thermal expansion coefficient (/°C)	Specific heat (J/g-°C)	Thermal conduc-tivity cofficient (W/m·K)	Specific electrical ($\mu\Omega$-cm)	Electrical conductivity to Cu(%)	Young's modulus (GPa)	Poisson's ratio
Titanium	**22**	**47.90**	**4.5**	**1,668**	**8.4×10^{-6}**	**0.53**	**17.0**	**55**	**3.1**	**116**	**0.34**
Iron	26	55.85	7.9	1,530	12×10^{-6}	0.44	76.2	9.7	18	200	0.31
18-8 Stainless steel (SUS 304)	-	-	7.9	1,400 ~ 1,420	17×10^{-6}	0.50	16.2	72	2.4	195	0.3
Aluminum	13	26.97	2.7	660	23×10^{-6}	0.90	210	2.7	64	68	0.33
Aluminum alloy (7075)	-	-	2.8	476 ~ 638	23×10^{-6}	0.96	120	5.8	30	71.7	0.33
Magnesium	12	24.32	1.7	650	25×10^{-6}	1.03	159	4.3	40	44	0.35
Magnesium alloy (AZ-31B)	-	-	1.8	605 ~ 630	26×10^{-6}	1.0	96	9.3	19	45	0.35
Nickel	28	58.69	8.9	1,453	15×10^{-6}	0.46	60.7	9.5	18	207	0.31
Nickel alloy (monel)	-	8.8	8.8	1,300 ~ 1,350	14×10^{-6}	0.43	21.8	48	3.6	170	0.29
Hastelloy C	-	-	8.9	1,305	11.3×10^{-6}	0.43	11.1	130	1.3	205	-
Copper	29	63.57	8.9	1,083	17×10^{-6}	0.39	385	1.7	100	110	0.34

Notes : 18-8 stainless steel : Cr(18%)-Ni(8%)-Fe(R)
Monel : Ni (70%)-Cu (30%) Hastelloy C : 54Ni-17Mo-15Cr-5Fe-4W
AZ-31B : Al (3%)-Zn (1%)-Mn (0.2%) - Mg(R)
7075 : Tempered and quenched ultra-super duraluminum [Cu (1.6%)-Mg (2.5%)-Cr (0.3%)-Zn (5.6%)-Al (R)]
Crystal structure α Titanium (≦885°C) : close-packed hexagonal lattice a=2.9504 Å c/a=1.587
β Titanium (≦885°C) : body-centered cubic lattice a=3.3065 Å
Latent heat of fusion : 14.5 cal/g Permeability : 1.0001

Technical Data

Corrosion Resistance

Comparison of corrosion resistance between titanium and other metallic materials

Classification	Corrosion medium	Concentration (%)	Temperature (°C)	Titanium	SUS304	SUS316	Hastelloy C
Inorganic acids	Hydrochloric acid	1	25 Boiling	**A** **D**	B D	A D	A C
		10	25 Boiling	**B** **D**	D D	D D	D D
	Sulfuric acid	1	25 Boiling	**A** **D**	A D	A C	A B
		10	25 Boiling	**B** **D**	B D	B D	A B
	Nitric acid	10	25 Boiling	**A** **A**	A A	A A	A B
		65	25 Boiling	**A** **A**	A B	A B	B D
Organic acids	Acetic acid	10 60	Boiling Boiling	**A** **A**	A B	A B	A A
	Ossalic acid	10 30	25 Boiling	**A** **D**	C D	B D	A A
	Formic acid	10 25	25 60	**B** **D**	B C	B B	B B
	Lactic acid	10 85	Boiling Boiling	**A** **A**	B D	B D	B B
Alkali	Sodium hydroxide	10 40	100 Boiling	**A** **D**	A B	A B	A B
	Potassium carbonate	5 20	Boiling Boiling	**A** **A**	A A	A A	A A
Inorganic chlorides	Sodium chloride	25	25 Boiling	**A*** **A**	B* B*	B* B*	B B*
	Ammlnium chloride	40	25 Boiling	**A*** **A***	B* C*	B* B*	A A*
	Zinc chloride	20 50	Boiling Boiling	**A*** **A**	D D	D D	D D
	Magnesium chloride	42	25 Boiling	**A*** **A**	A* A*	A* A*	A A*
	Iron chloride	30	25 Boiling	**A*** **A**	D D	D D	C D
Inorganic salts	Sodium sulphate	20	25 Boiling	**A** **A**	A A	A A	A A
	Sodium sulfide	10	25 Boiling	**A** **A**	A B	A B	A A
	Sodium chlorite	5 15	25 25	**A** **A**	C C	C C	C C
	Sodium carbonate	30	25 Boiling	**A** **A**	A A	A A	A A
Organic compounds	Methyl alcohol Carbon tetrachloride	95 100	25 Boiling	**A** **A**	A B	A B	A B
	Phenol Formaldehyde	Saturate 37	25 Boiling	**A** **A**	A A	A A	B B
Gas	Chlorine	Dry Humid	25 25	**D** **A***	A D	A D	A D
	Hydrogen sulfide	Dry Humid	25 25	**A** **A**	C B	B A	A B
	Ammonium	100	40 100	**A** **A**	A A	A A	A A
Others	Seawater	-	25 100	**A** **A***	A B*	A B*	A A*
	Naptha	-	80 180	**A** **A**	A* A*	A* A*	A A

A : 〈0.125mm / year B : 0.125~0.5mm / year C : 0.5~1.25mm / year D : 〉1.25mm / year *Local corrosion such as pitting and crevice corrosion resistance



Titanium Sheet for HEAT EXCHANGER

판형열교환기용(PHE) 고가공성 티타늄 판재

Mechanical properties 기계적 특성

Ultra-thin titanium plate for Excellent press formability (CP-Grade 1 VA)
High ductility (El → 45%), high formability (Erichsen value → 11mm)

프레스 성형성이 우수한 극박 티타늄 판재 (CP-Grade 1 VA)
고연성(El 〉45%), 고가공성(Erichsen value 〉11mm)

High Formabiity 판재 고성형성

High Formabiity (Forming Limit Diagram)


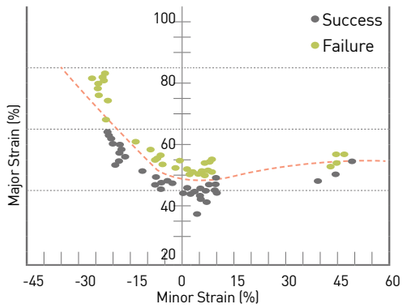


Plate Heat Exchanger





[Xenesys 社]

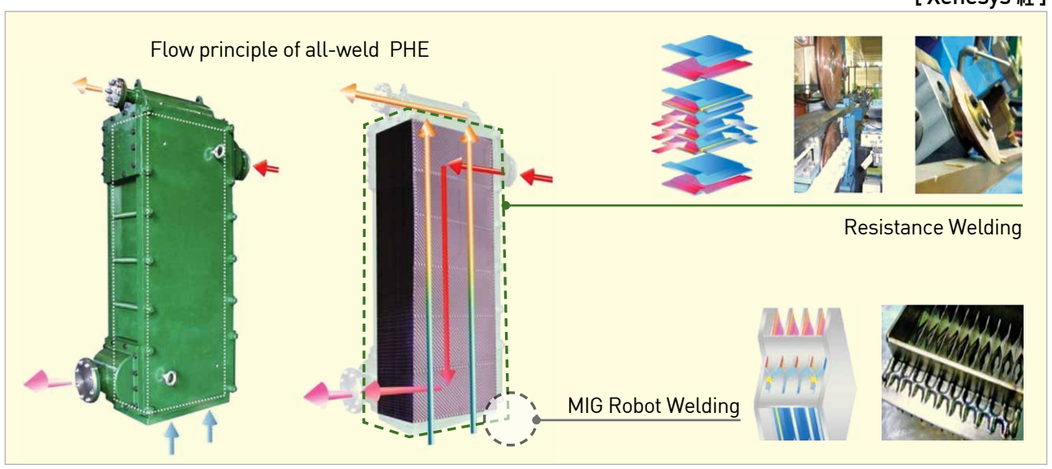



Titanium Welding Features

CP Titanium welding

- Weldability of CP titanium is good in general
- Impurities (O,N) during titanium welding cause changes in the mechanical properties
  ⇨ Blocking atmosphere or shielding gas required (Ar Gas)

- 순티타늄의 용접성은 일반적으로 좋습니다.
- 티타늄 용접 중의 불순물(O, N) 은 기계적 물성변화에 원인이 됩니다. ⇨ 대기차단 또는 보호가스 필요 (Ar 사용)

Properties of titanium materials and welds

Impurity content (wt%) by bulk chemical analysis	CP-Ti filler rod	CP-Ti plate
Oxygen	0.189	0.189
Nitrogen	0.011	0.007
Carbon	0.029	0.021
Bend strength, MPa (ksi)	N/A	109 (16)

Source: Struers e-Journal of Materialography, 3/2004

CP Titanium Welding process

- Gas Tungsten Arc Welding(GTAW) : Generally used 가장 많이 활용됨
- Gas Metal Arc Welding(GMAW) : Occur the spatter a lot 스패터 발생 많음
- Plasma Arc Welding(PAW) : Available till 10 mm by 1 pass welding : 10mm까지 1pass 용접가능
- Electron Beam Welding(EBW) : Welding aircraft parts and submarine apply 항공부품 및 잠수정 용접시 적용
- Laser Beam Welding(LBW)
- Friction Stir Welding(FSW)
- Resistance Welding(RW)

Power / Chemical / Desalination Plant



Thermal power plant



Dehydrogen Tower



Seawater Desalination Plant

Ocean Plant / Shipbuilding



Container ship



Plate Heat Exchanger




Plate Heat Exchanger

Due to its superior quality, Titanium is used in many fields of industry – nuclear/ thermal power plant, petro/chemical plant, ship building, ocean plant etc.

티타늄은 타 금속 대비 우수한 특성으로 원자력 / 화력발전소, 석유 / 화학 플랜트, 조선, 해양플랜트 등 다양한 산업에 사용되고 있습니다.

Main Application 1

Main Application 2

In addition to its wide usage in aerospace and military industry, titanium is also seeing increasing use in construction field.

티타늄은 우주항공, 군사 분야에 광범위한 사용은 물론, 최근 건축분야의 사용도 증가하고 있습니다.

Aerospace / Military



F-15k



K-11



Space Shuttle


Construction




Guggenheim Bilbao, Spain



Benz Museum, Germany



SPFC Building, Korea

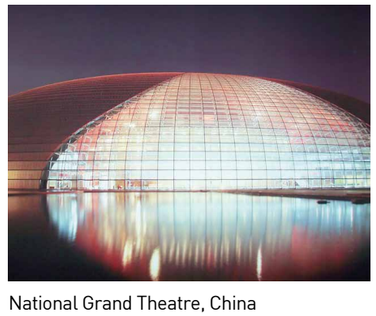

National Grand Theatre, China

Main Application 3

Moreover, titanium is appropriate for the products for sports, leisure, medical equipment, accessories, and the range of applications in industry is being expanded.

또한, 티타늄은 스포츠, 레저, 의료용 제품들과 액세서리에 적합한 소재로서,
그 응용분야가 확대되고 있습니다.

Sports / Leisure



Bicycle Frames



Golf Driver



Racket



Titanium Cookware



Automobile Muffler

Medical Equipment / accessories



Dental Plate & Spring



Glasses



Accessories

Titanium

Copyright © 2023 by POSCO
All rights reserved

Contact Us

POSCO Headquarters
Global Quality & Service Management Office
6261, Donghaean-ro, Nam-gu, Pohang-si,
Gyeongsangbuk-do, 38759 Republic of Korea
TEL 82-54-220-0114

Headquarters
6261, Donghaean-ro, Nam-gu, Pohang-si,
Gyeongsangbuk-do, 38759 Republic of Korea
TEL 82-54-220-0114
FAX 82-54-220-6000

Seoul Office
POSCO Center, 440, Teheran-ro,
Gangnam-gu, Seoul, 06194 Republic of Korea
TEL 82-2-3457-0114
FAX 82-2-3457-6000

Pohang Works
6262, Donghaean-ro, Nam-gu, Pohang-si,
Gyeongsangbuk-do, 37877 Republic of Korea
TEL 82-54-220-0114
FAX 82-54-220-6000

Gwangyang Works
20-26, Pokposarang-gil, Gwangyang-si,
Jeollanam-do, 57807 Republic of Korea
TEL 82-61-790-0114
FAX 82-61-790-7000

posco www.posco.com www.steel-n.com